

LOW VOLTAGE SHROUDING



Rigid Tubular Low Voltage Shrouding

Manufactured and supplied in accordance with EA Technical Specification 43-103 our Tubular Shrouding is approved to Class 2 of this specification. For temporary covering of overhead line conductors on low voltage systems the Shrouding protects electricity company personnel when carrying out low voltage live line working procedures or can be installed as protection for third parties working in the proximity of live low voltage conductors.

Bright orange colour keeps workers visually aware of the proximity of live conductors and helps in locating shrouding for recovery when jobs are complete. Supplied in 3 metre lengths with a 25mm internal diameter the shrouding is designed with cutouts at each end so that it can be easily opened and fed onto the conductor when wearing gloves. A connector is available for joining lengths of shrouding together. Manufactured from black rubber, the connector is folded over the shrouding and secured with plastic cable ties.



Cat. No. LVTS-3M

Insulating Rubber Shielding


Manufactured in the USA to conform with OSHA regulations for personal protective equipment Rubber Shielding is available in two classes - Class 0 (Yellow) with a maximum working voltage of 1kV and Class 1 (Yellow/Orange) with a maximum working voltage of 7.5kV. Provided in rolls 3ft wide by 25ft long the Rubber Shielding can be easily cut to suit any application. Ideal for providing protection against electrical apparatus such as relays, batteries or switch boards. Insulating shielding can also be supplied in pre-cut sizes with sewn on velcro edging.



Class 0 Cat. No. EL-0-25
Class 1 Cat. No. EL-1-25

Pocket and Conductor Shrouding

Used for many years as the industry standard Pocket Shrouds are made from double ply vinyl sheeting with velcro fastening and are used on low voltage lines to insulate pole top steel work. Also available on rolls as single ply vinyl conductor shrouding, the material has been tested to withstand 10.6kV (single ply) and 13kV (two ply).

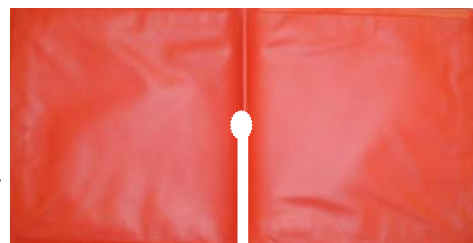

Pocket Shroud with Keyhole

CAT. NO	SIZE
0111	229mm x 467mm Two Way Fold
0112	229mm x 467mm Keyhole
0113	633mm x 610mm Pocket Shroud
0114	914mm x 1828mm Pocket Shroud
0115	762mm x 229mm Pocket Shroud
0116	914mm x 267mm Pocket Shroud
0117	1397mm x 229mm Pocket Shroud
L120	25 Metre x 120mm Conductor Shroud



Conductor Shroud - 25 Metre Roll

Tel: 01275 342700/Fax: 01275 349009
 E-mail: enquiries@hor-i-zon.com

A10
05/06