


JOINTERS SAFETY EQUIPMENT



DIELECTRIC BOOTS

Boots conform to prEN 50321 Live working up to 1000 volts AC. Complete boot will withstand 20kV, sole will withstand 30kV. Dielectric Boots contain a 200 joules steel toecap and feature a superior slip resistant rubber sole. Dielectric Boots offer protection for jointers and other workers in the power, construction, telecommunications and transport industries.

Available in sizes 3 to 12. Boot length is 15" (380mm).

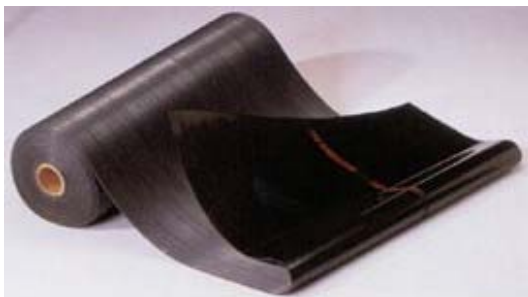

INSULATED SWITCHBOARD MATTING

Offering protection against electrical shock around high voltage equipment this corrugated, rubber Insulating Matting conforms to ASTM D178-93, Type 1, Class 2. Proof tested to 20kV, the maximum recommended use is 17kV. Available in 2ft (0.6m), 3ft (0.9m) and 4ft (1.2m) widths in lengths up to 75ft (22.8m). Thickness is 1/4" (6mm), colour, black.

JOINTERS UMBRELLA

This umbrella is constructed entirely of **non-conductive** and **flame retardant** materials. 8ft (2.5m) diameter, it has a telescopic, fibre-glass handle which extends to 9ft (2.7m). The translucent cover allows light through for a better working environment. Can be fitted with an additional curtain for greater protection against the elements.



WORK TENTS



SPEED TENTS

Speed Tents are available in square or triangular models in sizes up to 10ft (3m) x 10ft (3m) x 7ft (2.1m) high. Quick to erect in just 15 seconds, all poles are made from fibreglass. Covers available in translucent, flame retardant, non-conductive material.

Windows, vents and company logos can be added on request.

MODULAR TENTS

Modular Tents comprise of fibreglass poles, connecting blocks and flame retardant, non-conductive covers. No limitation to sizes available. Patented connection system is industry renowned for longevity and robustness.



Tel: 01275 342700/Fax: 01275 349009
E-mail: enquiries@hor-i-zon.com