

SNATCH BLOCKS & ROPES

NYLON SNATCH BLOCKS

Nylon Snatch Blocks are extremely light in weight. The Block and Sheave are constructed of rugged nylon reinforced fibreglass and have excellent dielectric properties. Available as a closed block or with side opening, Snatch Blocks come with a choice of forged steel hook with gate or open style meat hook. The Blocks have a 3" (76mm) diameter Sheave and will accommodate rope up to 5/8" (16mm) diameter. All Blocks are supplied with a test certificate. On request, Blocks can be made up into Hand Line Sets using Hand Line Hook and Polypropylene or Manila Rope.



CAT. NO.	DESCRIPTION	SWL	WEIGHT
3550	Side Opening Block with Swivel Hook and Gate	340 Kg	0.8 Kg
3551	Closed Block with Swivel Hook and Gate	340 Kg	0.8 Kg
3550-1	Side Opening Block with Meat Hook	100 Kg	0.8 Kg
3551-1	Closed Block with Meat Hook	100 Kg	0.8 Kg
P 10060	Hand Line Hook for use up to 12mm Dia. Rope	200 Kg	0.25 Kg



STEEL SNATCH BLOCK




Steel Snatch Block are available with safe working loads from 0.5 tonne to 6 tonnes. These Blocks have bushed sheaves and are suitable for use with wire rope, conductor or nylon rope. Blocks have swivel hook and safety catch.

CAT. NO.	SHEAVE DIAMETER	SWL	WEIGHT
SNBH075	3" (76mm)	500 Kg	1.7 Kg
SNBH100	4" (102mm)	1000 Kg	3.2 Kg
SNBH125	5" (127mm)	1500 Kg	5 Kg
SNBH150	6" (152mm)	2000 Kg	8 Kg
SNBH175	7" (178mm)	3000 Kg	12 Kg
SNBH200	8" (203mm)	4000 Kg	18 Kg
SNBH250	10" (252mm)	5000 Kg	27 Kg
SNBH300	12" (305mm)	6000 Kg	40 Kg

SASH LINE ROPES

Sash Line Ropes we offer have a stranded polyester core with a soft, cotton outer sheath. This easily identifiable red rope is ideal for handling. Supplied in 8, 10, 12 and 14mm diameter with safe working loads of 127 Kg, 320 Kg, 400 Kg, 425 Kg respectively (each with a factor of safety of 6) in lengths to suit your requirements. Rope can be provided with plain, sealed end or large or small spliced eye and with or without plastic thimble.

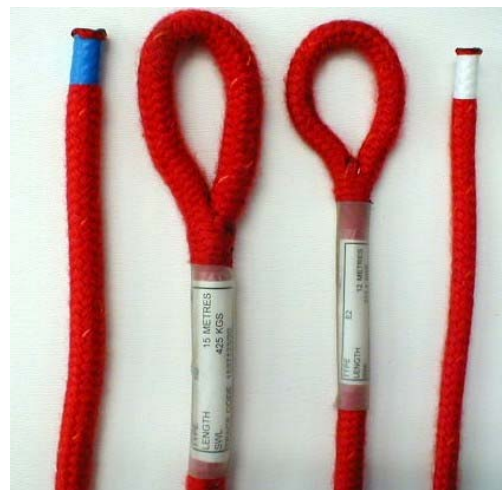

Tel: 01275 342700/Fax: 01275 349009
 E-mail: enquiries@hor-i-zon.com